



产品体系表


105°C 普通品

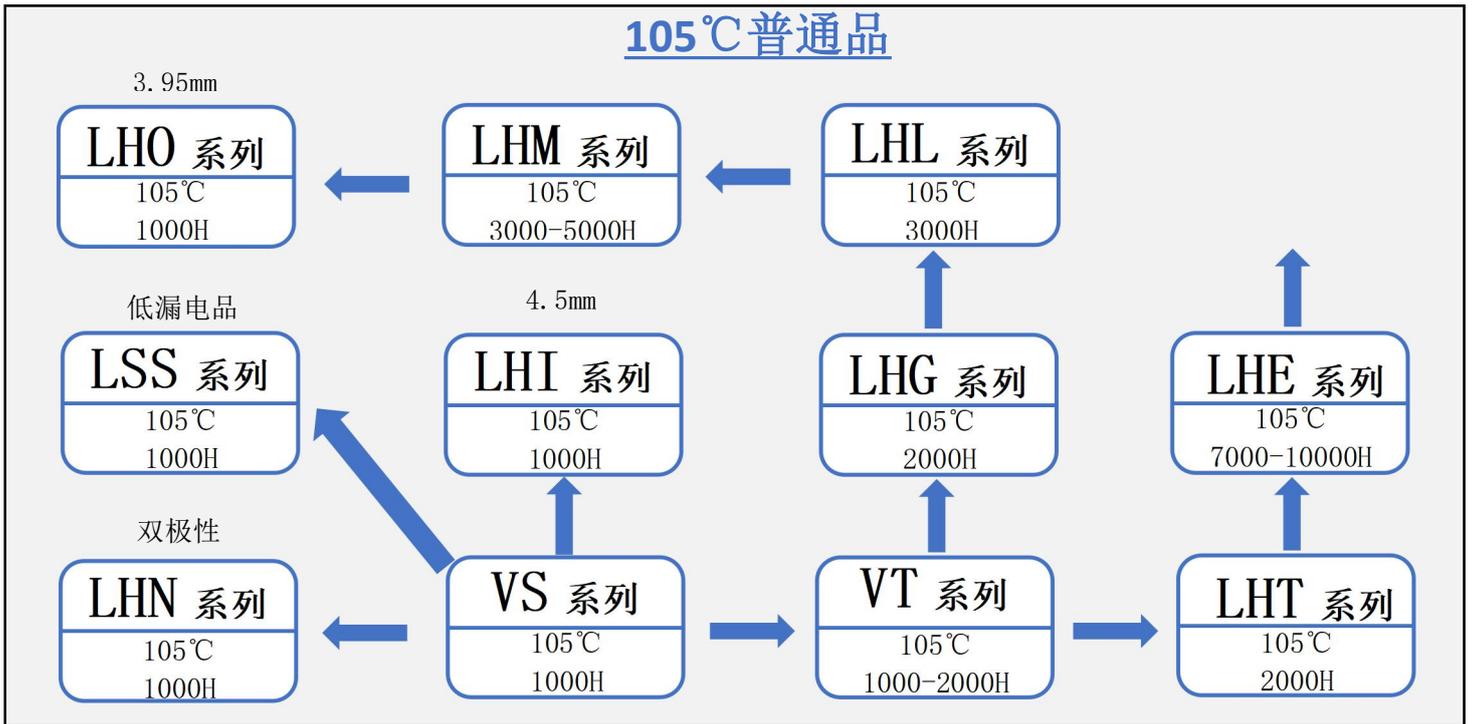

125°C 高温品

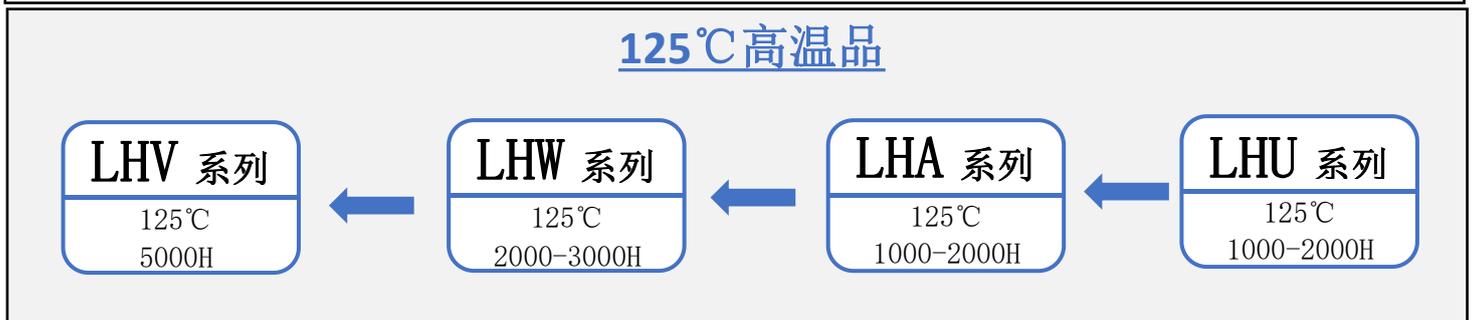

105°C 中高压品

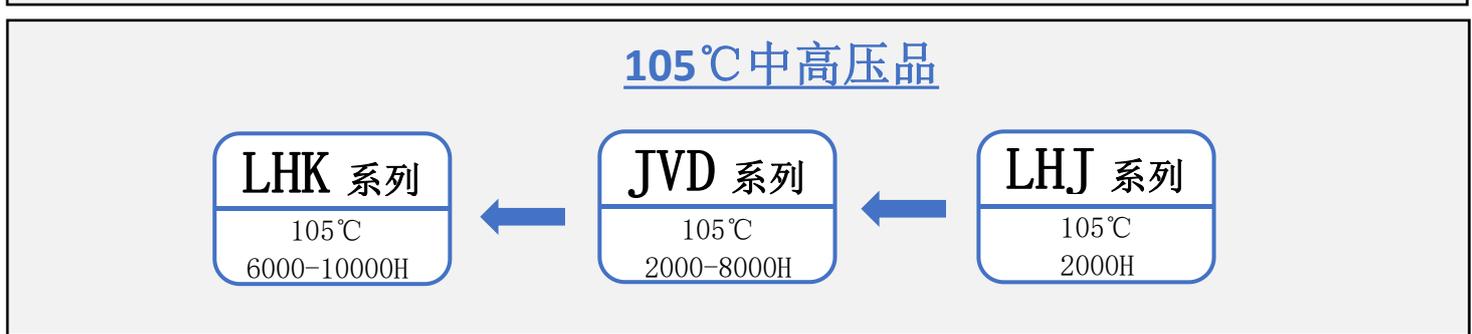

105°C 低阻抗品

